

QUOTATION OF MINI780H WHEEL LOADER

Delivery time: About 45 working days upon receipt of deposit

Warranty: 18 months

Packing: 2 sets/20GP; 5 or 6 sets/40HQ (change with small iron wheels when loading)

Price List

Model	Picture	Standard Configurations	FOB Qingdao Price (USD)
Mini780H (Hydrostatic system)		Kubota V1505 Euro 5/EPA 4 engine 18.2kw, 4WD, 31x15.5-15 tires, electronic joystick, standard bucket, VARTA Battery, floating function,adjustable steering wheel and seat, back sound, hand brake, tool box. Standard with 3 hydraulic lines; Quick hitch included,	

Option Configuration

Option	Price (USD)
Enclosed cabin with heater	Included
4 Hydraulic line	
Change to Xinchai E5 engine	
Change to Perkins 403J-11T EPA/E5 engine	
Electric air conditioning	



Attachments

Pallet fork		Grass fork	
Hydraulic adjustable pallet fork		Snow bucket	
Snow blade with spring		Auger	
V Blade		Bale spear(2&3 teeth)	
4 in 1 bucket		Open Sweeper	
Drum clamp		grass cutter	
digger arm (Backhoe bucket)		Log clamp (H model/A model)	

No tooth bucket		Screening bucket	
Dustpan bucket		Closed street sweeper	
Lifting arm		Grass bucket	
Pitch fork		New European grass fork	
Bale grab		Leveller	

Specifications

Whole drive system	Hydrostatic system	
Specification	Overall weight (kg)	2400
	L×W×H (mm)	4036 x 1446 x2260
	Rated bucket capacity(m ³)	0.3-0.4
	Rated load(kg)	1000
	Dump height (mm)	1980
	Dump distance(mm)	800
	Wheel base(mm)	1595
	Thread(mm)	1101
	Total time(s)	8
Engine	Model	KUBOTA V1505 E5/EPA4
	Rated power (KW)	18.2
	Rated speed(r/min)	2300
Steering system	Max. turning angle	40
	Min turning radius(mm)	3800-4200MM
Hydraulic system	Working pressure	16Mpa
	Boom lifting time	4.2S
Tires	Standard tires	31x15.5-15
Standard bucket	Width (mm)	1600

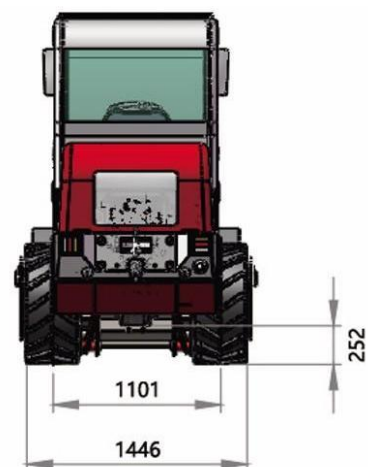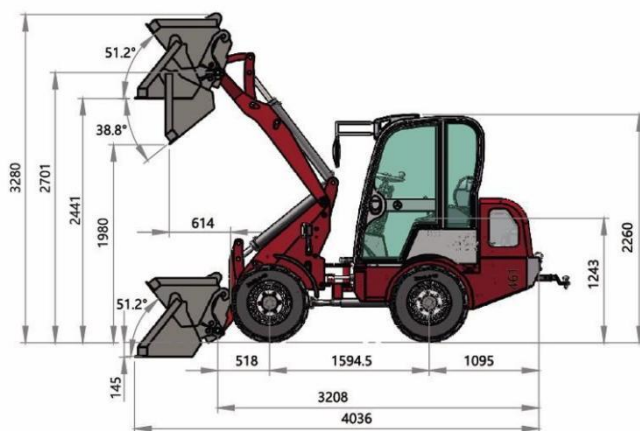

Pictures

